


# PARKING


The typical car parking space should measure 2.8m wide by 5.0m long. This allows for a width of 0.4m for door opening within the space. The width can be reduced to 2.4m if a 0.4m clearance is available immediately adjacent to one side of the space. A 6.0m aisle width is required in front of the space to allow vehicles to easily turn into and out of it. This aisle width may be reduced if the space width is widened accordingly.

## EXAMPLE OF A THREE SPACE PARKING BAY

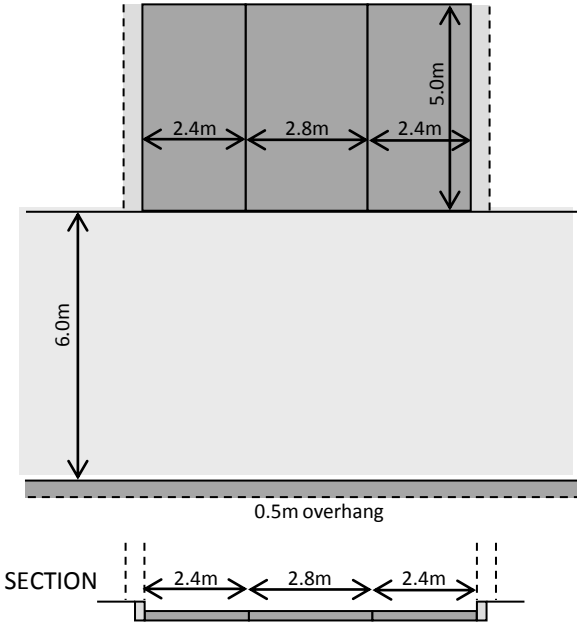

## PARKING SPACES FOR DISABLED PEOPLE

Parking bays for disabled people are designed so that drivers and passengers, either of whom may be disabled, can get in and out of the vehicle easily. They allow wheelchair users to gain access from the side and rear.

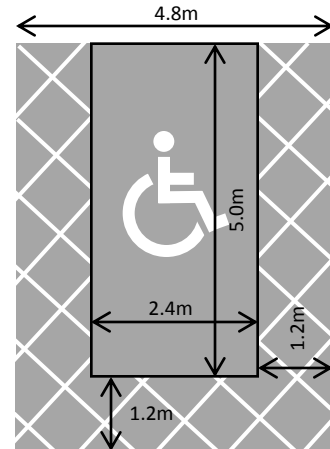

## PARALLEL PARKING ARRANGEMENT

For parking parallel to the highway, each space should measure 2.4m wide by 6.0m long.

